

USER MANUAL

PRAXIS

SERIES 1801/1802

www.xigmatek.com

Accessory List

	Pan Washer Screw X 20 ミリネジ		Copper Stand Off X 6 #取付が難しい場合は、ベンドを使用してください。
	Pan Head Screw x 10 インチネジ		Hexagon Screw X 6 インチネジ
	Motherboard Rivets x 3		Cable Tie X 3
	Thumb Screw x 1		



1.1 To remove the front panel, apply a pulling force to the bottom while supporting the top of the case.

1.2 Unscrew the side panel thumb-screws found on the back of the case.

1.3 With one hand on the side panel handle and one supporting the side panel, apply a pulling force towards the back of the case.

1.4 Once pulled back, direct the side panel laterally and it will be free from the case.

■ Open front panel and side cover to begin installation

■ Offenes Front Panel und Side Cover

■ Oppna front och sidoluckorna

■ Abra el panel frontal y el lateral

■ 取付ける前面パネルとサイドパネルの取り外し

■ 打開前面板與側蓋

■ Yan kapadı arşak

■ Ouvrez le panneau avant (façade) et le panneau latéral pour commencer l'installation



2.1 To install the power supply unit, place the power supply with the female socket and on/off button facing outwards. Use the hexagonal screws, found in your accessories packet, to secure your power supply.

- Power supply unit installation
- Powersupply Installation
- Installation av nättidell
- Instalación de la Fuente de alimentación
- 電源ユニットの取り付け
- Установка блока питания
- 安装电源供应器
- Güç Kaynağı birimi montajı
- Installation de l'unité d'alimentation

2



3.1 Install your I/O panel shield into the long cutout found at the rear of the case. Apply pressure to all four corners to snap the shield in place (be sure to have the I/O shield installed the right way by checking the ports found on the side of your motherboard).

3.2 Inspect your motherboard and it's layout and match the screw-holes with the ones found in the interior of your case with the copper standoffs and plastic rivets found in your accessories packet.

3.3 Place your motherboard on the standoffs/rivets and then secure with pan washer screws.

- Motherboard installation
- Motherboard Installation
- Installation av moderkort
- Instalación de la placa base
- マザーボードの取り付け
- Установка материнской платы
- 安装主板
- Anakart montajı
- Installation de la carte mère

3

1



- 4.1 (1) Remove the 5.25" optical disk drive cover by applying outward pushing pressure (whilst holding the release mechanism) to one side then the next. (2) Remove the external 3.5" drive cover by applying inward pushing pressure (whilst holding the release mechanism) to one side then the next.
- 4.2 Place your drive into the 5.25"/3.5" slot and align with the protrusion of your front panel.
- 4.3 Secure your optical disk drive with the pan washer screws and 3.5" drive with pan head screws found in your accessories packet.
- 4.4 Replace the front panel of your case.

4



- 5.1 Choose your desired drive placements and align the mounting screw holes with the ones found on your drive. 2.5" SSD use the pan washer screws found in the accessories packet.
- 5.2 For 3.5" drives, use pan head screws found in the accessories packet. It is advised to first use bays, which do not obstruct airflow.
- 5.3 Secure drives by making sure maximum screws per drive are used.

5




- 6.1 For add-on card installation, unscrew the hexagonal screw (found on the rear interior) securing your add-on card shield.
- 6.2 Remove the add-on card cover of the slot you intend to use by bending outwards and away from the case.
- 6.3 Install your add-on card and secure to the case with hexagonal screws. Replace the add-on card shield and secure with the extra thumb-screw found in the accessories packet.

6



- 7.1 For front fan installation, remove the front panel. Match your 12cm fan with the mounting holes and secure the fan from the outside of the case. It is advised that you secure all four corners of your fan to prevent bending and/or vibrations.
- 7.2 ファンの固定にはターバネジ (ファンに付属されているネジ) をご使用ください。
- System fan installation
■ System Lüfter Installation
■ Chassislüfter
■ Instalación de los ventiladores
■ システムファンの取り付け
■ Установка вентиляторов
■ 安装系統風扇
■ Sistem Fanı montaj
■ Installation du système de ventilation

7

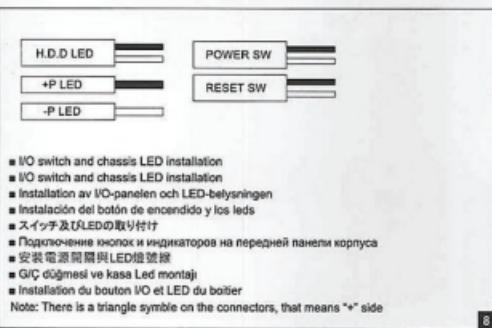

- I/O switch and chassis LED installation
■ I/O switch and chassis LED installation
■ Installation av I/O-panelen och LED-belysningen
■ Instalación del botón de encendido y los leds
■ スイッチ及びLEDの取り付け
■ Подключение кнопок и индикаторов на передней панели корпуса
■ 安装電源開關與LED燈號
■ GIÇ düğmesi ve kasa Led montaj
■ Installation du bouton I/O et LED du boîtier
- Note: There is a triangle symbol on the connectors, that means "+" side

8



Motherboard USB3.0 connector case USB3.0 connector (Optional)



- USB, and Azalia(HDA) connector installation
■ USB, and Azalia(HDA) connector installation
■ Installation av USB, och Azalia(HDA)
■ Instalación de las conexiones USB, y Azalia (HDA)
■ USB, オーディオコネクタ取り付け
■ Порядочение внутренних разъемов USB, и Azalia(HDA)
■ 安装USB, 與音訊端子出接頭
■ USB, and Azalia(HDA) baglanti montaj
■ Installation du connecteur USB, et Azalia(HDA)

9



- 10.1 The back-side of the motherboard tray has a cut-outs for easy CPU cooler installation and cable management. User cable ties and wires to manage your cables. Be sure not to obstruct the area designated for the side panel or you will have difficulties locking it back in.
- Cable management
■ Kabel Management
■ Kabelorganisering
■ Colocación de los cables
■ ケーブル整理
■ Кабель организаци
■ 線材整理
■ Vida Listesi
■ Gestión de cable

10

XIGMATEK
www.xigmatek.com
E-mail: sales@xigmatek.com

2015 © XIGMATEK Co., Ltd. All rights reserved.

All trademarks are the property of their respective owners.